

GENERAL NOTES

1. This drawing is protected under the copyright Act and cannot be used or produced in part or whole without authors consent.
 2. Read only figured dimensions.
 3. All construction work is to comply with the latest K.B.S standard codes of practice, Local Authority By-Laws and Fire regulations.
 4. P.V denotes permanent ventilation and must be provided above all doors and windows where indicated or shown.
 5. All walls less than 200mm thick to be reinforced with hoop iron at every alternate course.
 6. Water Meter to be 300mm above G.L.
 7. D.P.C denotes one layer of bituminous felt to be provided under all walls 150mm above G.L.
 8. All R.C works to structural engineers details.
 9. Provide 1 row of 600x600x 50mm precast concrete paving around the building unless otherwise shown.
 10. Contractors must verify all dimensions and levels on site before commencing work. Any discrepancies must be reported to the architect before work is put in hand.
 11. All levels shown are finished levels unless otherwise stated. /
 12. All surface beds to be cast on well compacted and well consolidated filling.
 13. Depth of foundation trenches to be minimum 600mm below reduced ground level.
 14. All pipes and services to be minimum 450mm below reduced ground level



#Contact Company

**PROJECT NAME:
PROPOSED STAFF APARTMENTS ON
PLOT NO. 209/8726 OFF POPO ROAD,
SOUTH C NAIROBI COUNTY.**

SECTION DETAILS


DRAWN BY:
CHEPUNG'ETICH CYNTHIA
EABI/02688/2019.

Drawing Scale
1:100

Drawing no:
06



SECTION 01

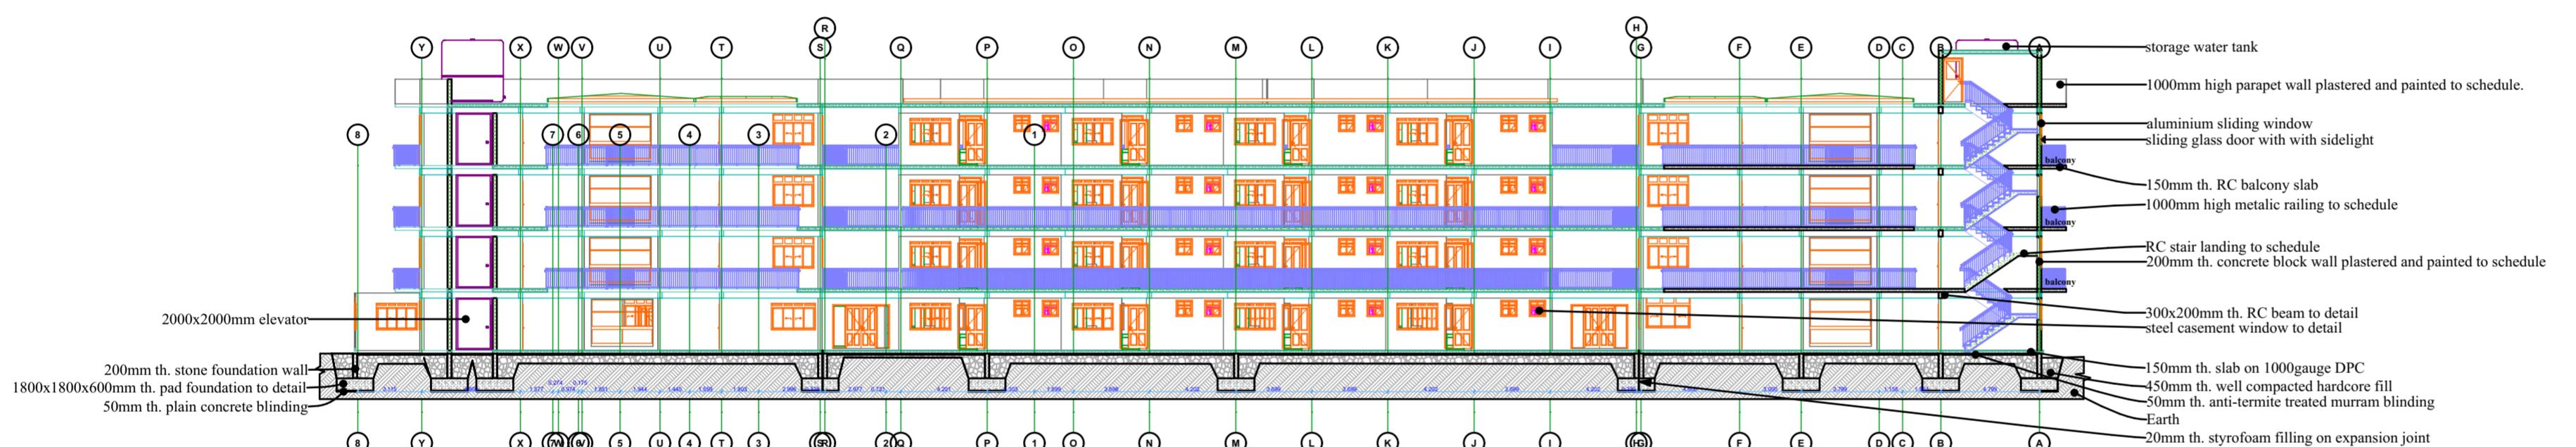

SECTION 02

